


LOCATION: DELAWARE BASIN, TEXAS



TerrAdapt adaptive drill bit mitigated stick-slip, increased efficient drilling time by 45%

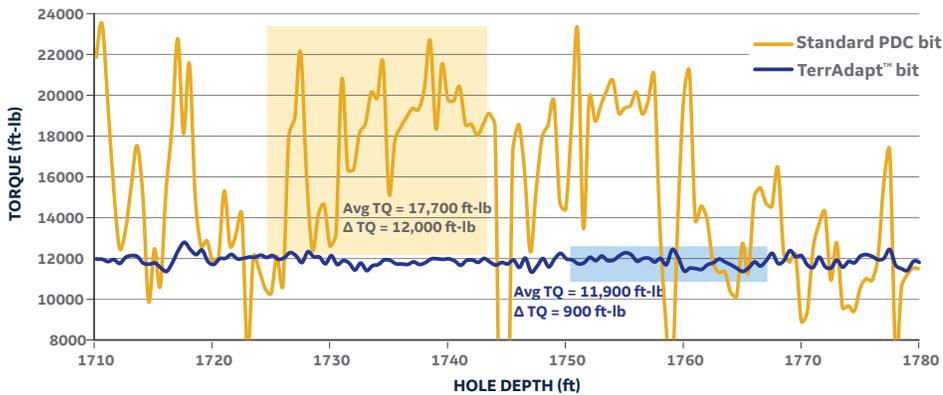

By automatically adjusting DOC control throughout the run, the TerrAdapt adaptive bit was able to mitigate vibrations to smooth out drilling performance, enabling a longer, faster run with consistently lower surface torque compared to an offset with a standard PDC bit.

An operator in Reeves County, Texas was experiencing erratic drilling performance in 12¼ in. intermediate sections running through interbedded shale, limestone, and salt. Extremely high torque fluctuations and stick-slip were affecting drilling efficiency, and downhole tool failures were driving up NPT and costs. Looking to minimize downtime and complete the next sections as quickly as possible, the operator contacted Baker Hughes, a GE company (BHGE).

Based on the operator's challenges, BHGE proposed using a **TerrAdapt™ adaptive drill bit** to improve drilling

performance and reduce non-productive time by proactively mitigating stick-slip and impact loading. It incorporates self-adjusting depth-of-cut (DOC) control elements to mitigate torsional instability—which can lead to stick-slip—and to absorb sudden impact loads from formation variations. The bit limits DOC when sudden loading is experienced at the bit face, and increases DOC during smooth drilling to maximize ROP.

The TerrAdapt bit completed the 3,355 ft (1023 m) section in one run, increasing ROP by 27% compared to ROP on offset wells drilled with standard PDC bits. ROP averaged 168 ft/hr and the surface torque

Results

- Mitigated vibrations and stick-slip
- Protected the bit from impact damage
- Drilled 27% faster
- Increased efficient drilling time by 45%
- Reduced average torque by 35%, and torque variations by 90%

Challenges

- Improve ROP and mitigate downhole tool failure through stick-slip-prone formations
- Maintain stable drilling through interbedded formations with stringers

BHGE solution

Deployed a TerrAdapt adaptive drill bit to mitigate vibrations and stick-slip

generated by the TerrAdapt bit was 45% lower on average and 90% more consistent. This translated to more efficient drilling, with up to a 45% improvement in mechanical specific energy recorded. These results indicated dramatically reduced stick-slip and torsional oscillations, and the section was completed with no damage to the BHA.



The TerrAdapt bit showed a very good dull condition after the run because its adaptive elements mitigated stick-slip and absorbed impacts to protect the cutters.

bhge.com

© 2017 Baker Hughes, a GE company, LLC – All rights reserved.

Baker Hughes, a GE company, LLC and its affiliates ("BHGE") provides this information on an "as is" basis for general information purposes and believes it to be accurate as of the date of publication. BHGE does not make any representation as to the accuracy or completeness of the information and makes no warranties of any kind, specific, implied or oral, to the fullest extent permissible by law, including those of merchantability and fitness for a particular purpose or use. BHGE hereby disclaims any and all liability for any direct, indirect, consequential or special damages, claims for lost profits, or third party claims arising from the use of the information, whether a claim is asserted in contract, tort, or otherwise. The BHGE logo is a trademark of Baker Hughes, a GE company, LLC. GE and the GE monogram are trademarks of General Electric Company used under trademark license. TerrAdapt is a trademark of Baker Hughes, a GE company, LLC.

67284

**BAKER
HUGHES**
a GE company

